







#### ■ Features

- · Constant Voltage + Constant Current mode output
- · Circular shape PCB type design
- · Built-in active PFC function
- Function options: output adjustable via potentiometer;
   3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


### Applications

- · LED bay lighting
- · LED down lighting
- LED spot lighting
- · LED mining lighting
- · LED stage lighting

### Description

HBG-240P series is a 240W AC/DC PCB type LED driver featuring the circular shape design. It operates from  $90\sim305$ VAC and offers the dual mode constant voltage and constant current output models with different rated voltage ranging between 36V and 60V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for -40 °C ~ +45 °C under free air convection. HBG-240P is equipped with various function options, such as dimming methodology, so as to provide the optimal design flexibility for LED lighting system.

### **■** Model Encoding

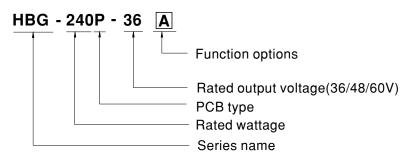

Туре	Function	Note
Α	lo adjustable through built-in potentiometer.	In Stock
В	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock







#### **SPECIFICATION**

		HBG-240P-36	HBG-240P-48	HBG-240P-60		
	DC VOLTAGE	36V	48V	60V		
ОИТРИТ	CONSTANT CURRENT REGION Note.2	21.6 ~ 36V	28.8 ~ 48V	36 ~ 60V		
	RATED CURRENT	6.7A	5A	4.0A		
		241.2W	240W	240W		
	RIPPLE & NOISE (max.) Note.3		250mVp-p	350mVp-p		
	RIFFEL & NOISE (IIIAX.) Note.3	Adjustable for A-Type only (via built-in potentiometer)				
	CURRENT ADJ. RANGE	4.0 ~ 6.7A 3 ~ 5A 2.4 ~ 4.0A				
	VOLTAGE TOLEDANIOS ::	±2.0%	3~3A	2.4 ~ 4.0A		
	VOLTAGE TOLERANCE Note.4	±0.5%				
	LINE REGULATION	±0.5%				
	LOAD REGULATION	2500ms, 120ms / 115VAC 500ms, 120ms / 230VAC				
	SETUP, RISE TIME Note.6					
	HOLD UP TIME (Typ.)	15ms/115VAC,230VAC				
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)				
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR	PF≥0.98/115VAC, PF≥0.94/230VAC, PF≥0.9/277VAC@full load				
	TOWERTACION	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)				
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)				
	EFFICIENCY (Typ.)	92.5%	93%	93.5%		
	AC CURRENT	2.8A / 115VAC 1.4A / 230VAC	1.2A / 277VAC			
	INRUSH CURRENT(Typ.)	COLD START 75A(twidth=680µs measured at 50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	2 units (circuit breaker of type B) / 3 units (circuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA/277VAC				
PROTECTION		95 ~ 108%				
	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed				
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.				
	OVER VOLTAGE	43 ~ 52V	52 ~ 63V	62 ~ 85V		
		Shut down and latch off o/p voltage, re	e-power on to recover			
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down				
	WORKING TEMP.	Ta=-40 ~ +45°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)				
	WORKING HUMIDITY	20 ~ 95% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)				
	VIBRATION	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes				
	SAFETY STANDARDS	UL8750,CSA C22.2 No.250.13-12; ENEC EN61347-1,EN61347-2-13,EN62384, GB19510.1,GB19510.14 approved				
045577.0	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC				
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH				
EMC	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (@load ≧75%); EN61000-3-3, GB17743, GB17625.1				
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547,light industry level(surge immunity:Line-Earth:4KV,Line-Line:2KV)				
OTHERS	MTBF	175Khrs min. MIL-HDBK-217F (25°C)				
	DIMENSION	Refer to mechanical specification				
	PACKING	0.62Kg; 20pcs/13.4Kg/1.11CUFT				
NOTE	Please refer to "DRIVING M.     Ripple & noise are measure     Tolerance: includes set up     De-rating may be needed u     Length of set up time is me     The driver is considered as     complete installation, the fin     To fulfill requirements of the connected to the mains.	becially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.  NG METHODS OF LED MODULE".  assured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  et up tolerance, line regulation and load regulation.  led under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.  s measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.  et as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the  final equipment manufacturers must re-qualify EMC Directive on the complete installation again.  of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently				

File Name:HBG-240P-SPEC 2016-05-03









#### ■ BLOCK DIAGRAM

fosc: 100KHz

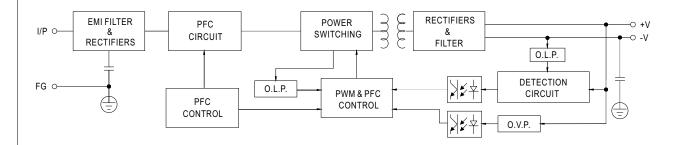

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.



Typical output current normalized by rated current (%)


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.






#### **■ DIMMING OPERATION**

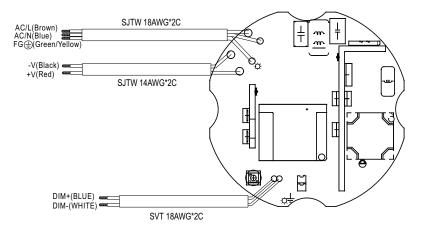


#### **X** 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   1 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)


#### O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"



O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):



"DO NOT connect "DIM- to -V"






File Name:HBG-240P-C-SPEC 2016-05-03







#### Applying additive resistance:



"DO NOT connect "DIM- to -V"



Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

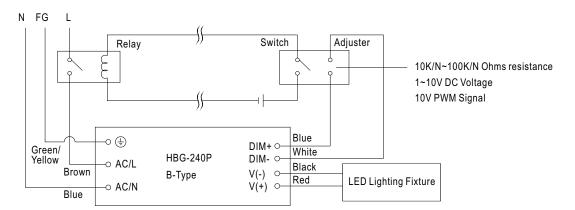

Using a switch and relay can turn ON/OFF the lighting fixture.



File Name:HBG-240P-C-SPEC 2016-05-03

